


FIG. 2.

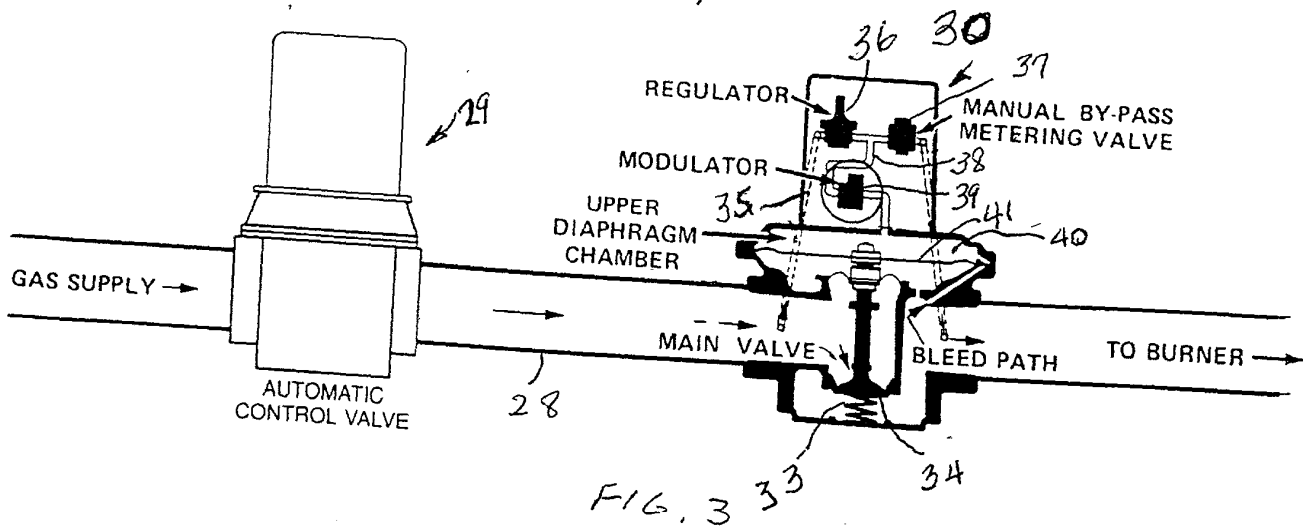

Gas Burner and Piping Assembly

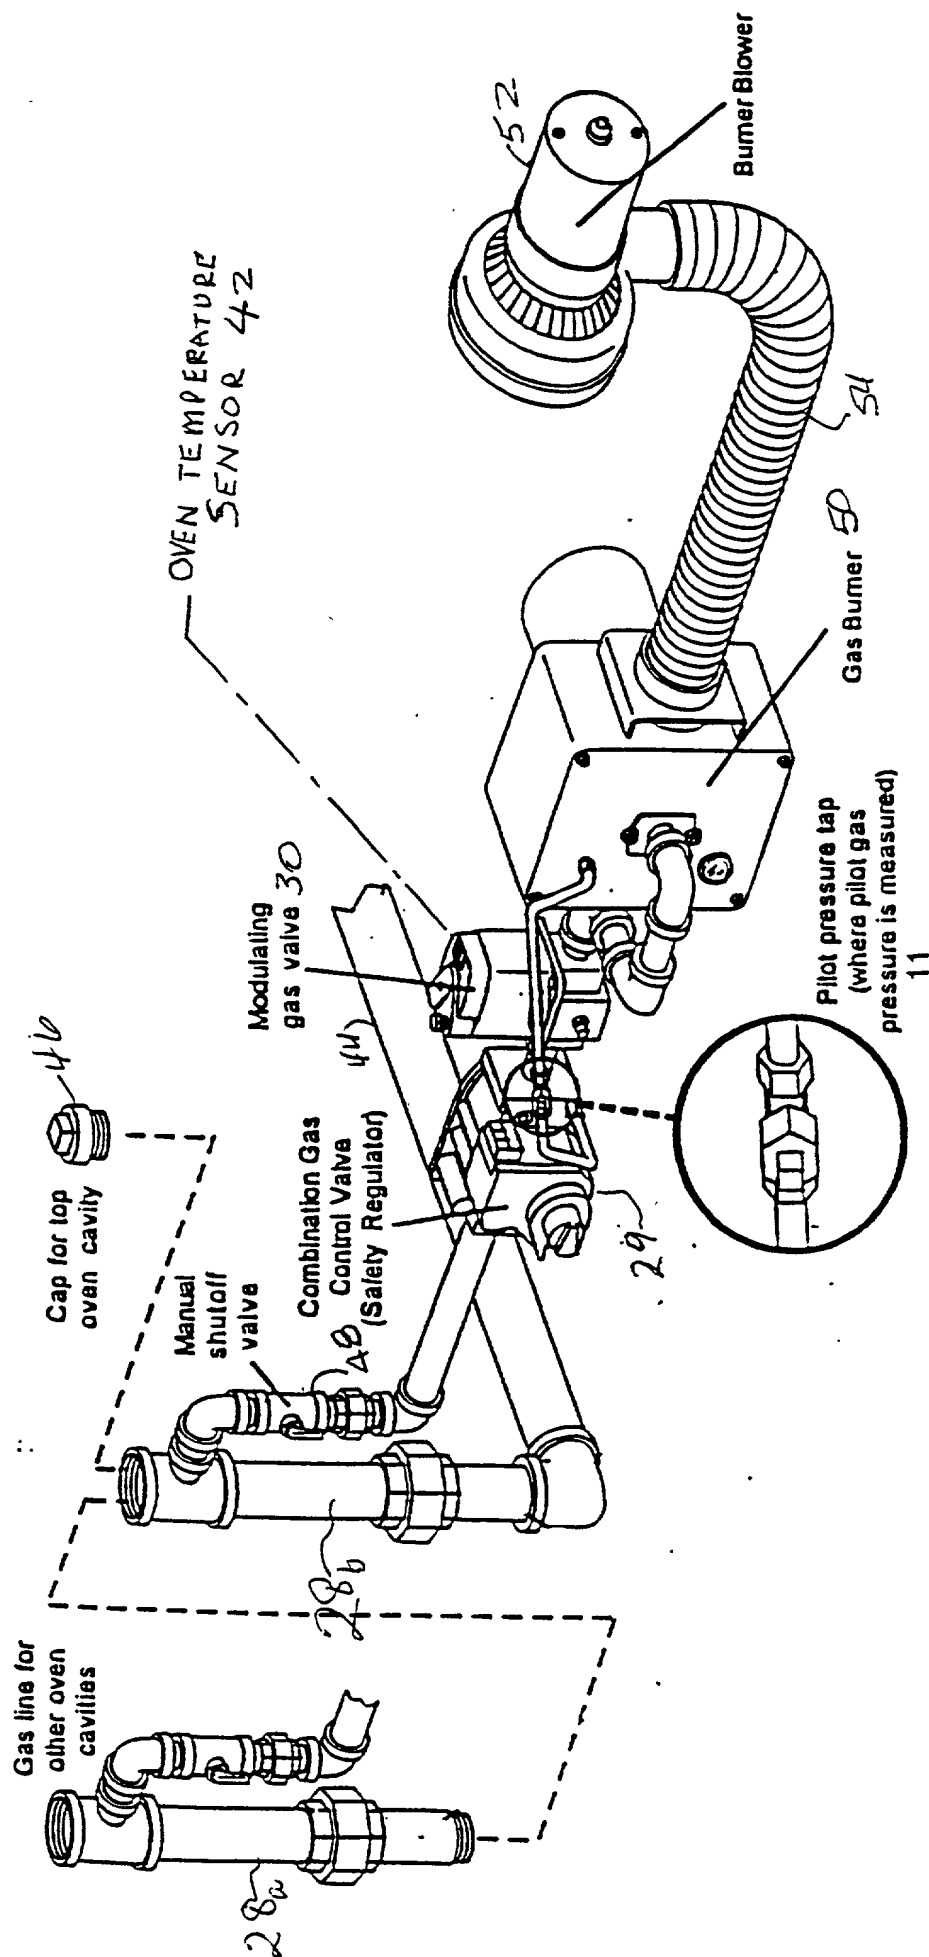


FIG. 4




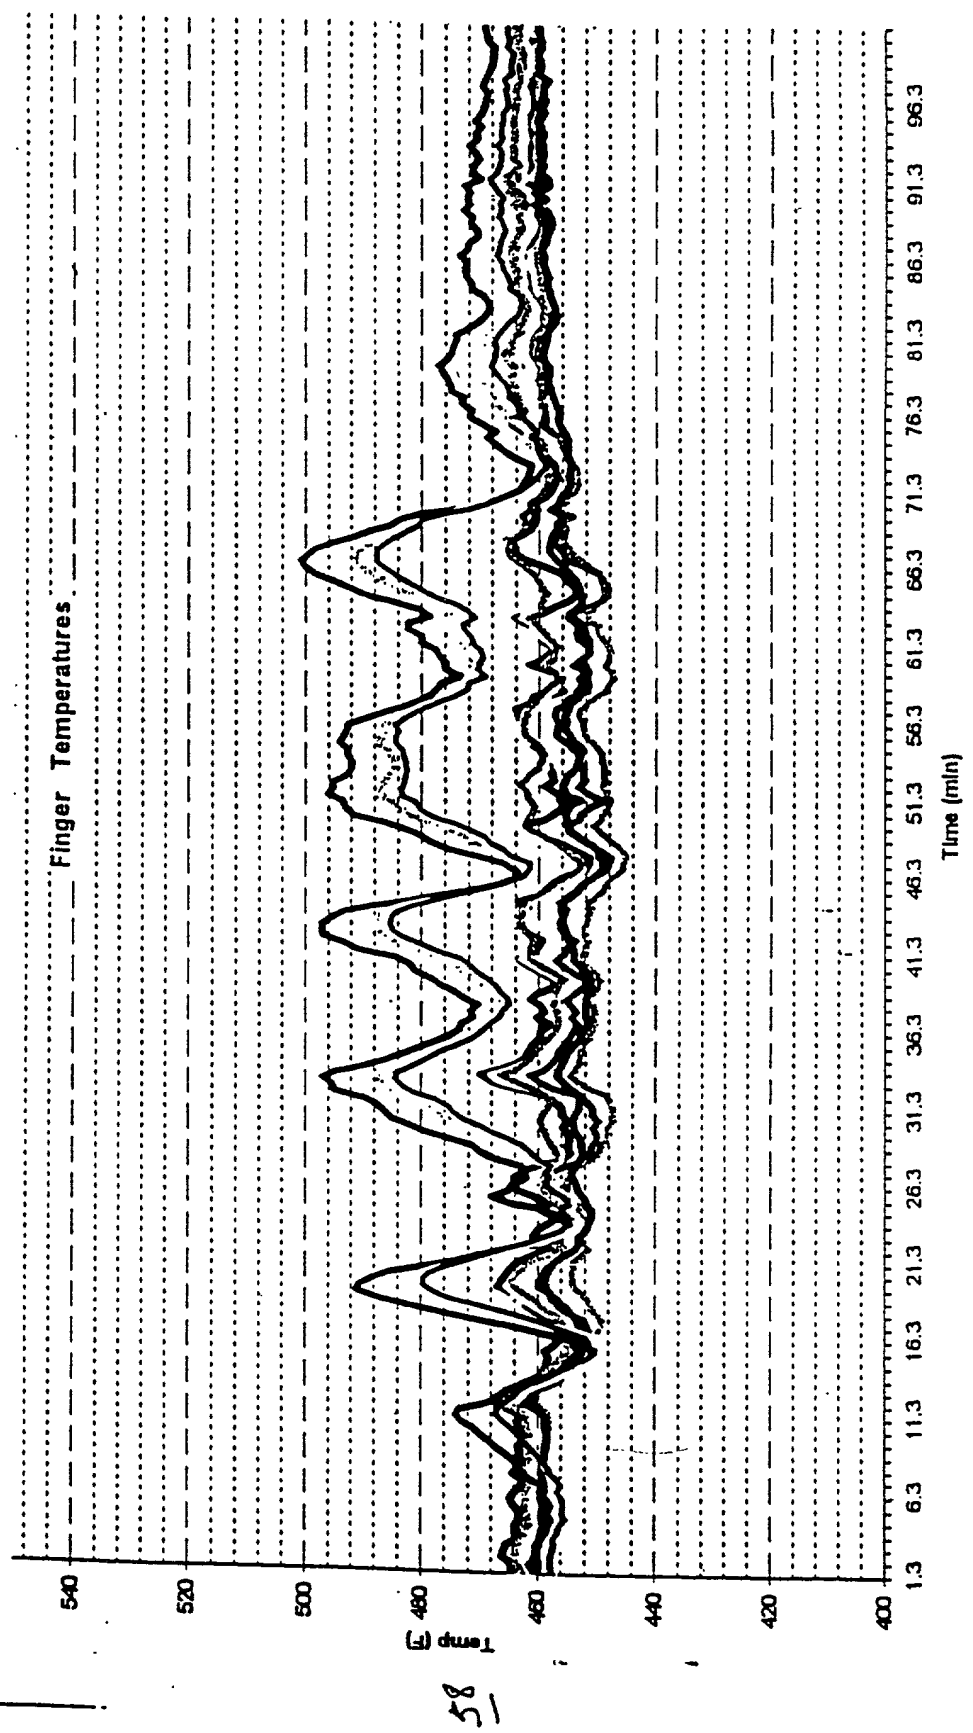


FIG. 5 (Prior Art)

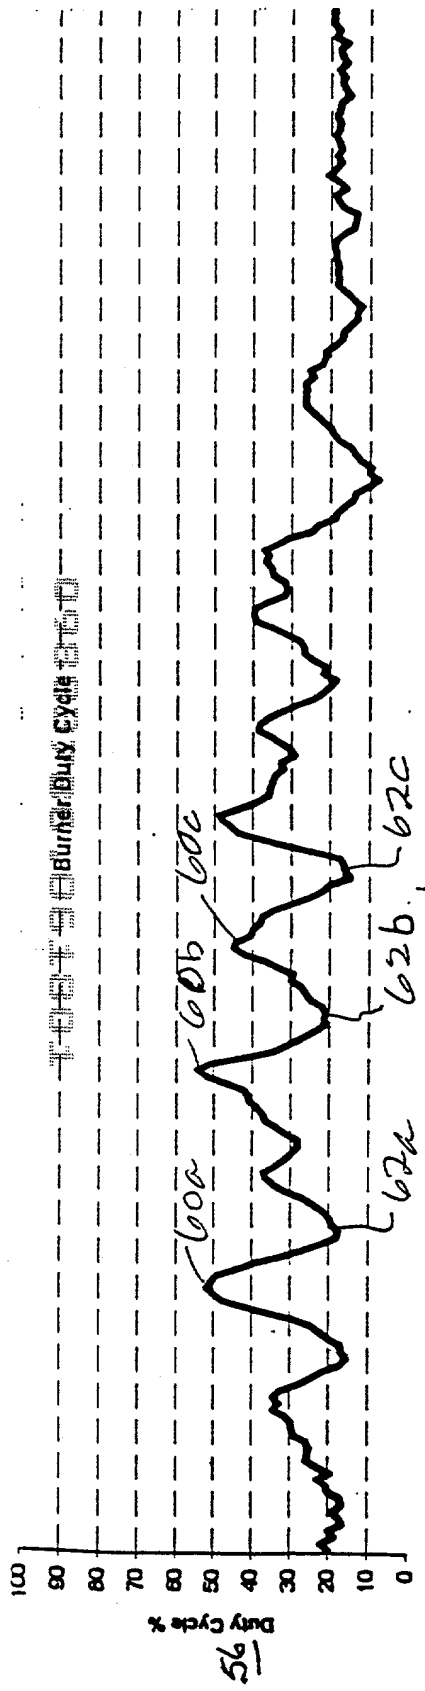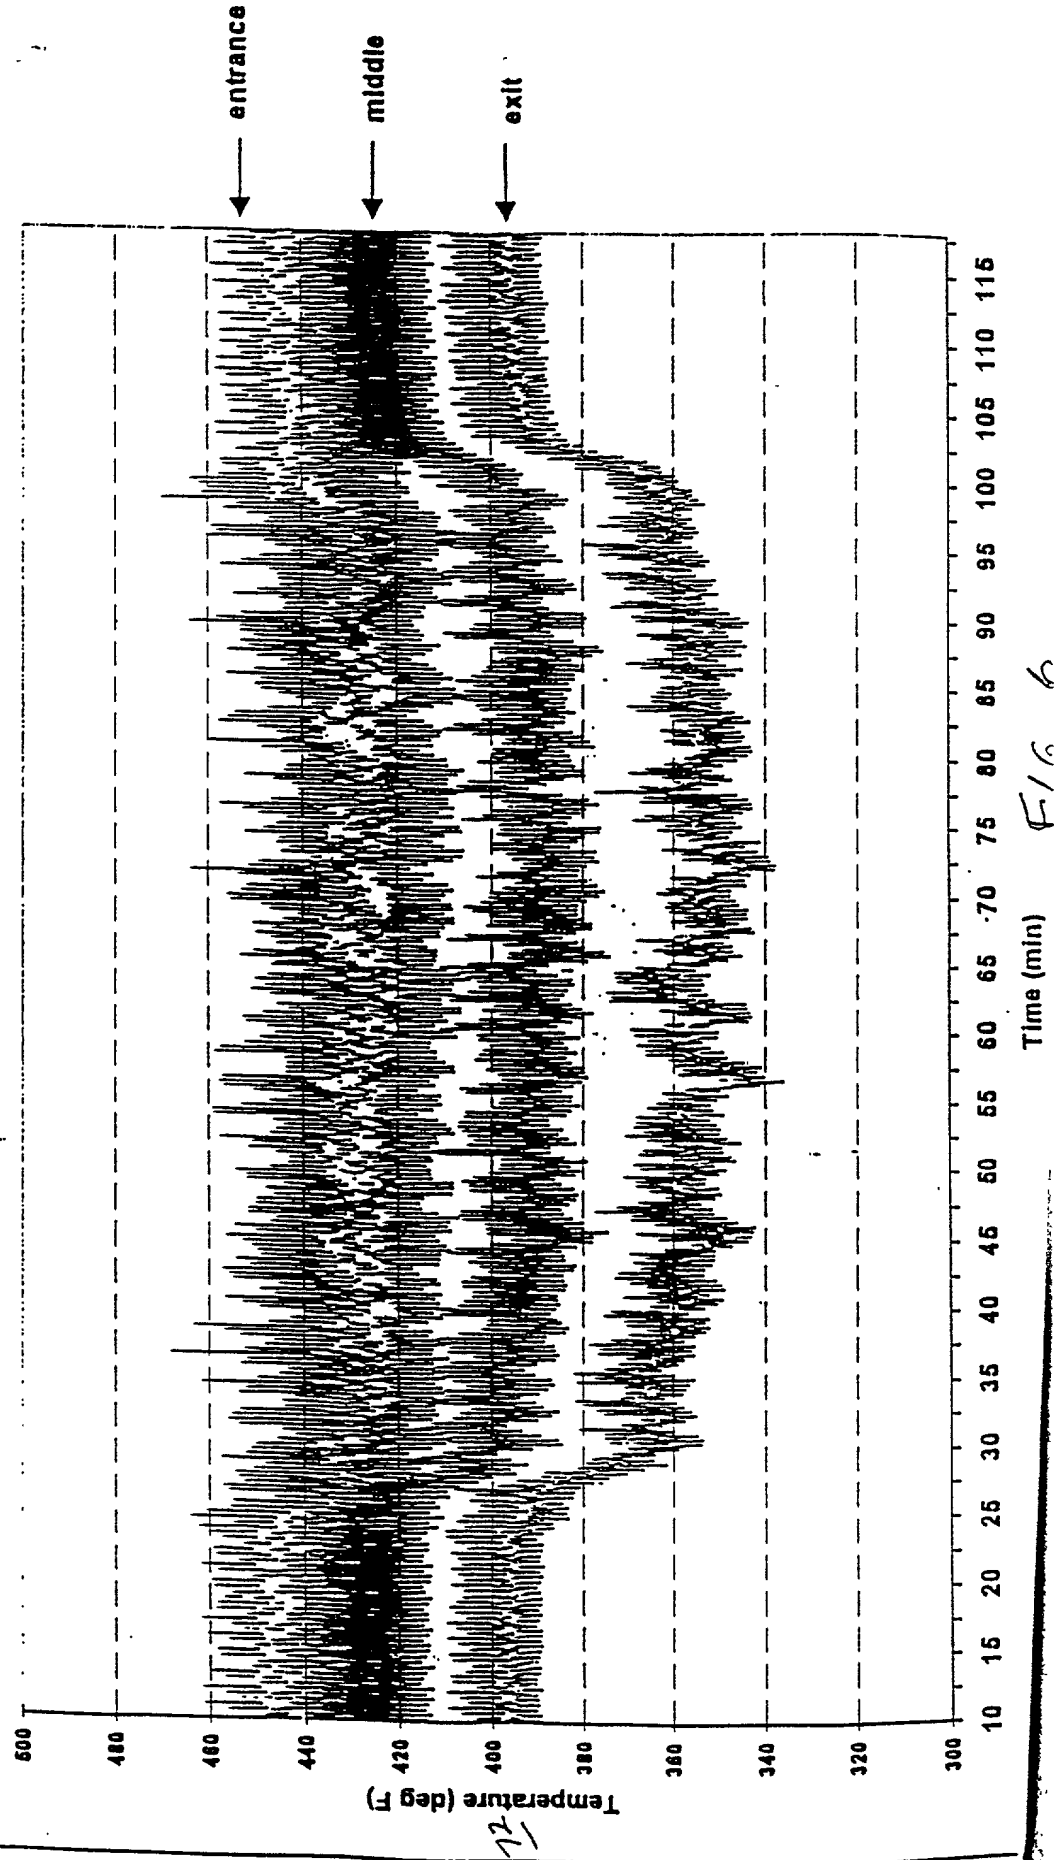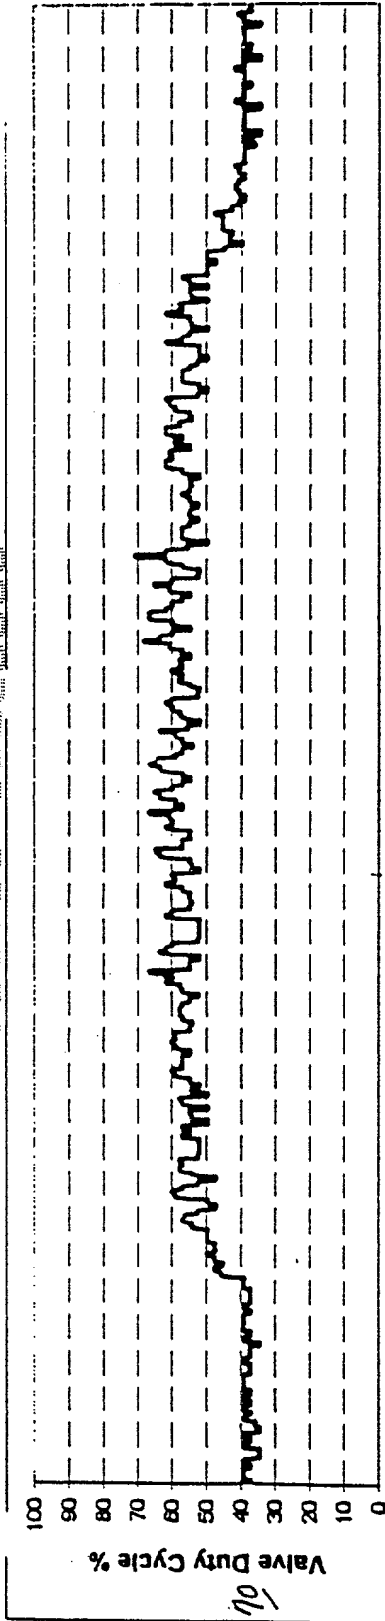

5/1/6

TOP 90" 9846860


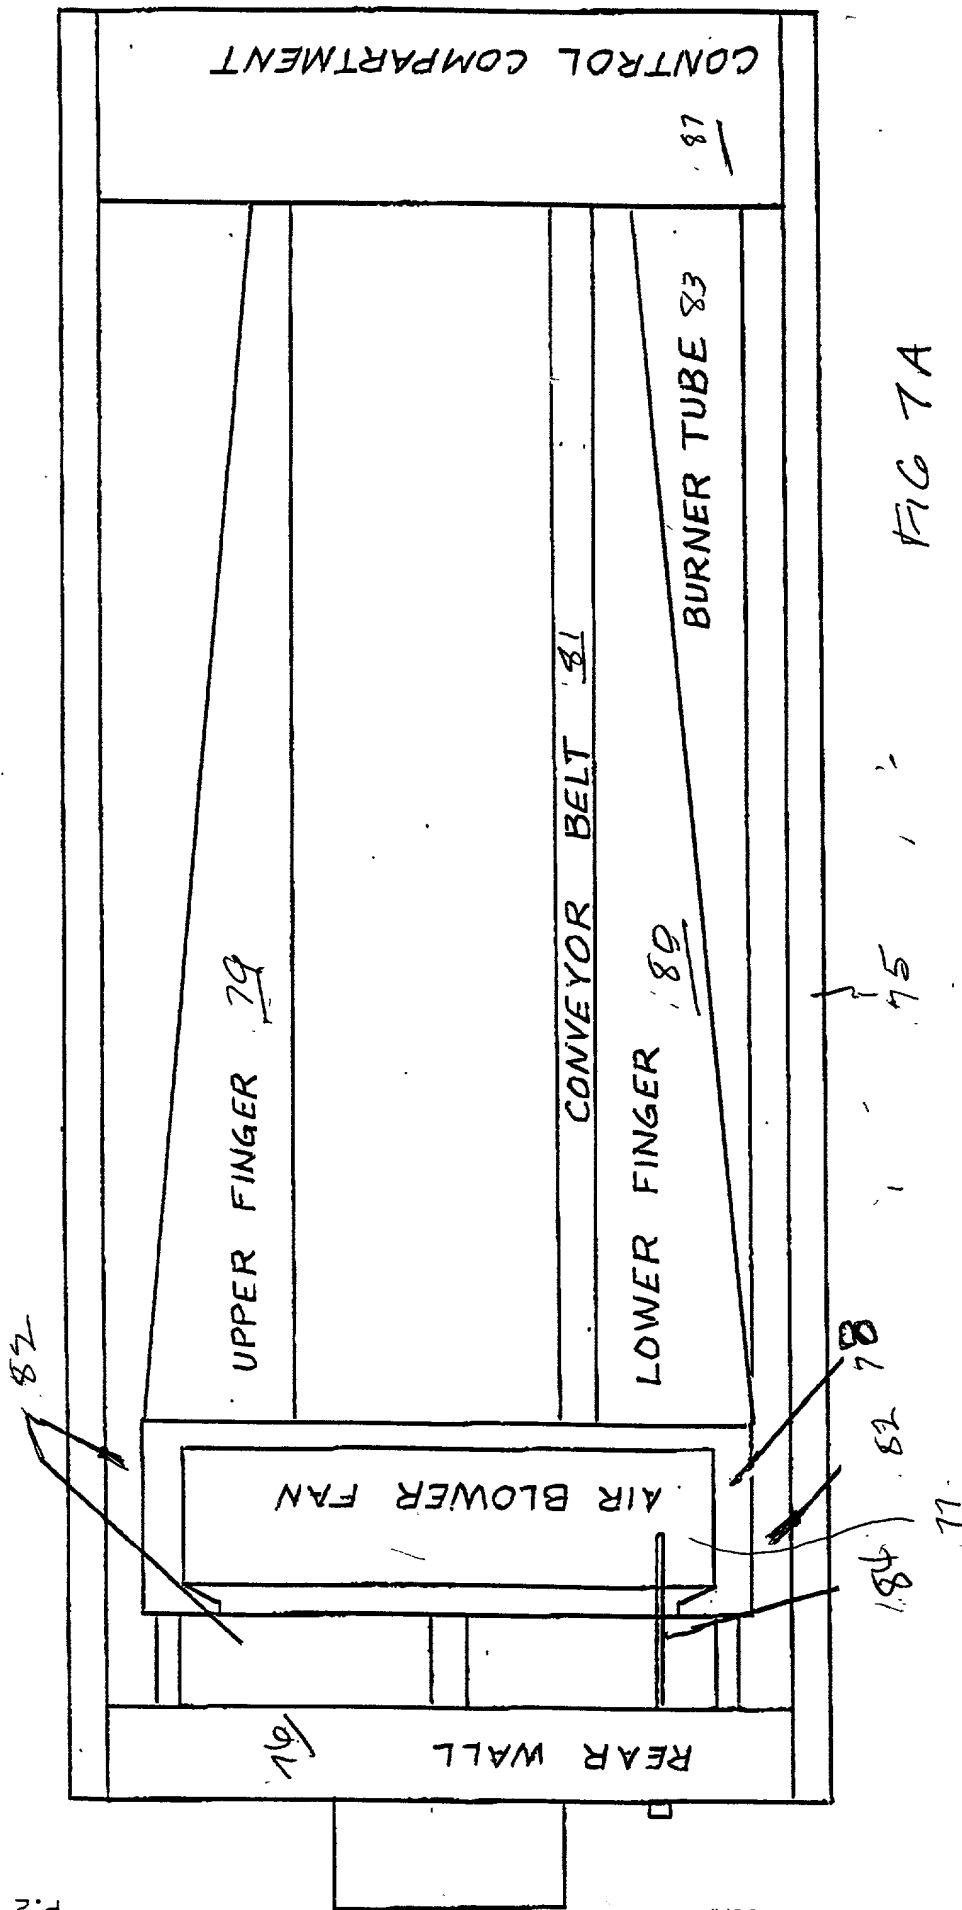


FIG 7A


WSS
4/10/01

09883786-051801

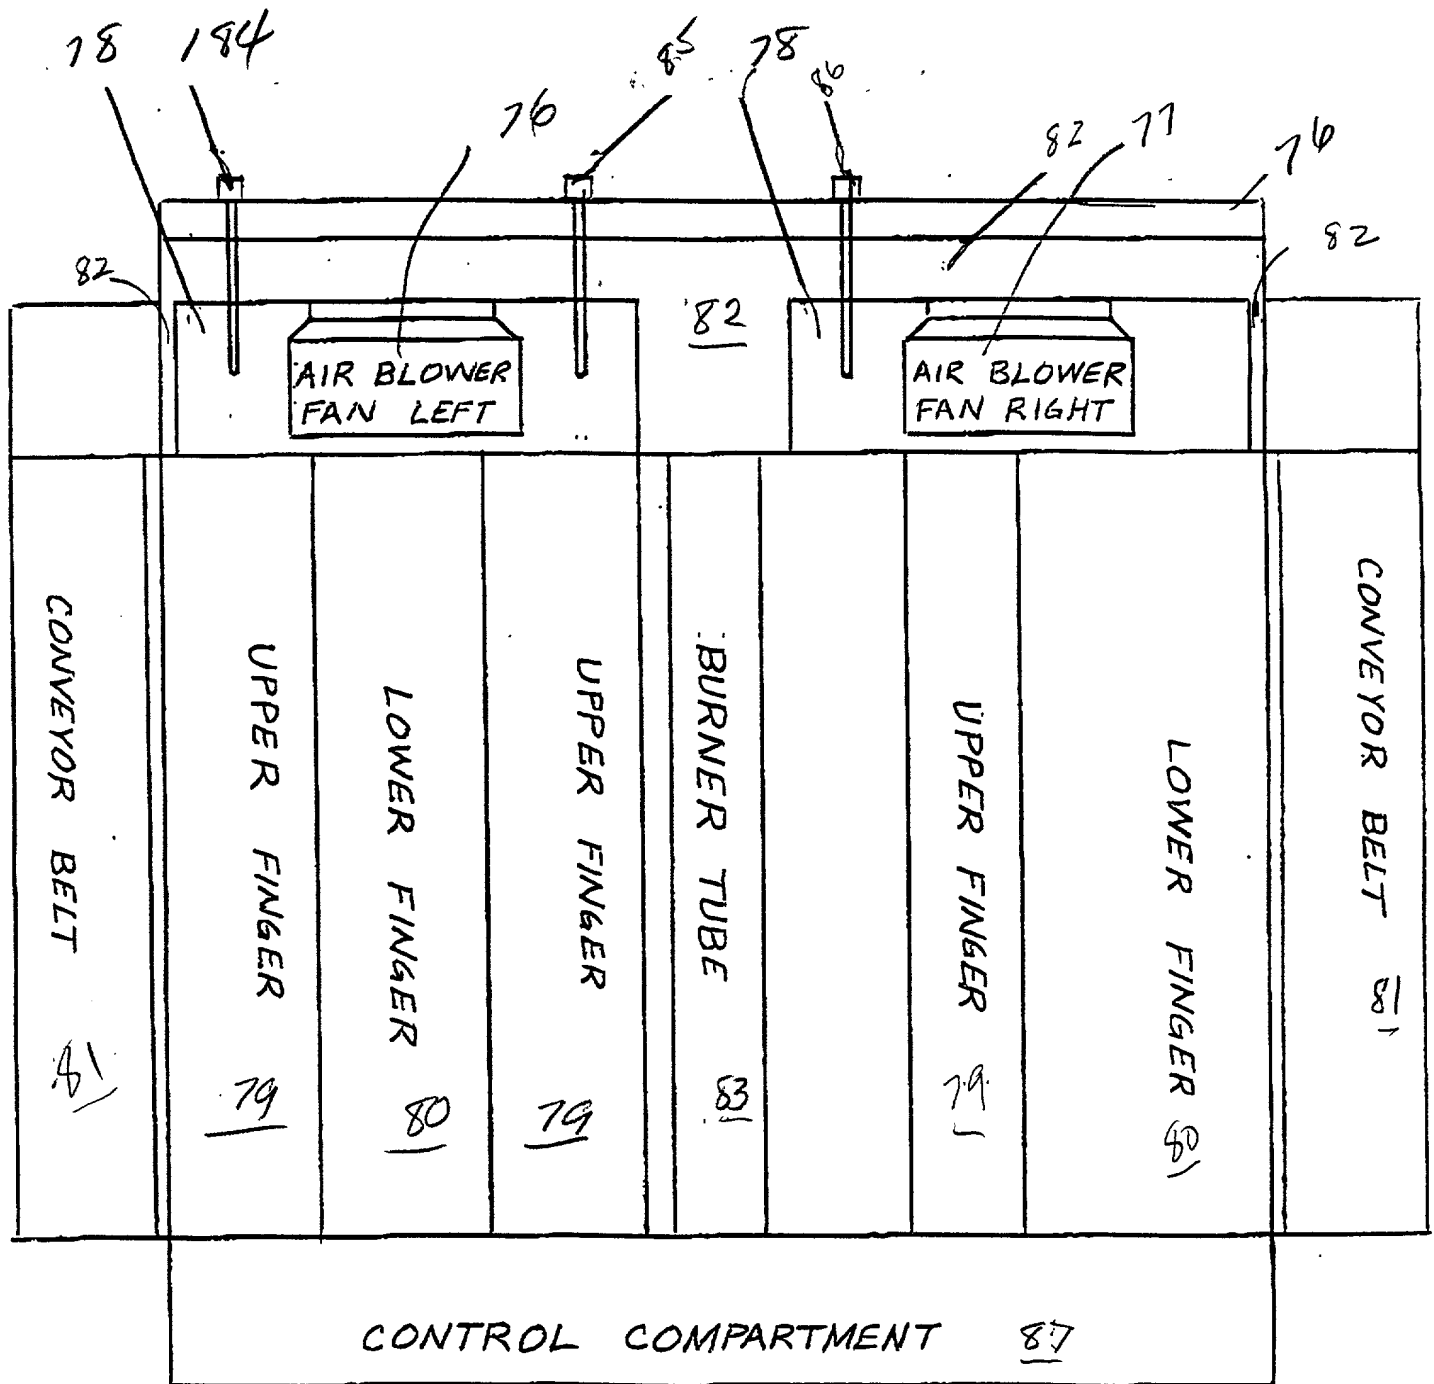

FRONT OF OVEN

FIG 1B

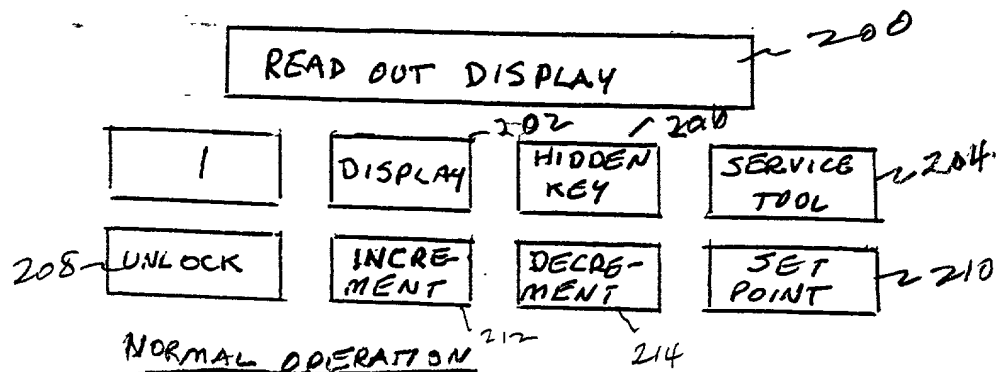

1. ACTUAL TEMPERATURE
2. SET POINT; THE TEMPERATURE OF THE OVEN
3. UNLOCK; RETAINS DISPLAY FOR 60 SECOND OR UNTIL HIDDEN KEY IS PRESSED

DIAGNOSTIC

1. • FLASHES "PLC" IF A FAIL SAFE CONDITION EXISTS
- FLASHES "RUN" WHILE OVEN IS RUNNING NORMALLY
- FLASHES "DONE" WHEN RUN IS COMPLETED
- FLASHES "SE" IF INITIAL TEMPERATURE IS LOW
- FLASHES "OPEN" IF OVEN IS OPEN
- FLASHES "TC" IF THERMOCOUPLE LEADS ARE REVERSED

SERVICE MODE

- SET POINT FLASHES TO PROMPT A SETTING OF DESIRED TEMPERATURE
- DEGREE IN OVEN, EITHER IN C OR IN F
- DEFAULT DISPLAY
- OVER TEMPERATURE

FIG 9